


Configuration transparent, bendable
 Pixel Pitch 40,00 mm
 Transparency **75%**

Please note that this is a basic datasheet for rental customers and planning. Extensive documentation and manuals are available - we encourage you to get in touch if you consider this material for use in dry-hire jobs.



details

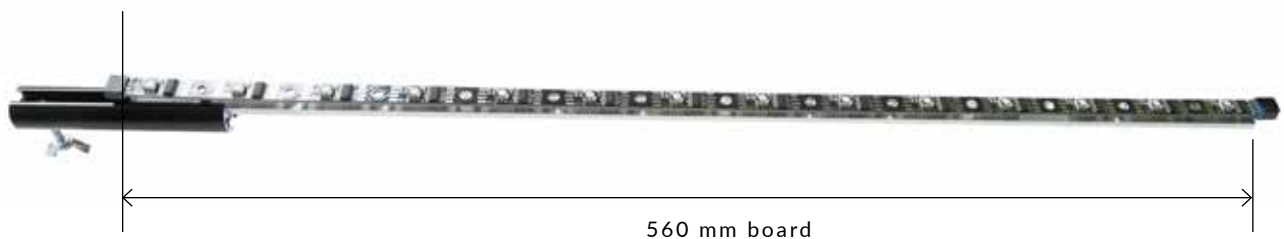

curveLED® P40.0 ceiling B1

Technical Overview			
Pixelpitch	40,0 mm	protection class	IP54
Configuration	SMD black-face LED	Transparency	75% bei 40mm pitch
Brightness	2360 mcd/px	Avg. Power Consumption	0,3 W/px
fire protection	B1 and non-dripping	working temp	25°C
		ambient operating temperature	0-65°C